


Maßtabelle für Drähte und Litzen

Conductor Data for Wires (solid and stranded)



AWG	Draht-Litze Stranding	Durchmesser mm	Diameter inches
	Nominalwerte	Nominals	
40	1/40	0.079	0.0031
39	1/39	0.089	0.0035
38	1/38	0.102	0.0040
37	1/37	0.114	0.0045
36	1/36	0.127	0.0050
	7/44	0.152	0.0060
34	1/34	0.160	0.0063
	7/42	0.191	0.0075
32	1/32	0.203	0.0080
	7/40	0.229	0.0090
	19/44	0.254	0.0100
30	1/30	0.254	0.0100
	7/38	0.305	0.0120
	19/42	0.330	0.0130
28	1/28	0.320	0.0126
	7/36	0.381	0.0150
	19/40	0.406	0.0160
26	1/26	0.404	0.0159
	7/34	0.483	0.0190
	19/38	0.508	0.0200
24	1/24	0.511	0.0201
	7/32	0.610	0.0240
	19/36	0.610	0.0240
22	1/22	0.643	0.0253
	7/30	0.787	0.0310
	19/34	0.813	0.0320
20	1/20	0.813	0.0320
	7/28	0.965	0.0380
	19/32	1.016	0.0400
18	1/18	1.024	0.0403
	7/26	1.219	0.0480
	19/30	1.270	0.0500
16	1/16	1.290	0.0508
	7/24	1.524	0.0600
	19/29	1.448	0.0570
	26/30	1.524	0.0600

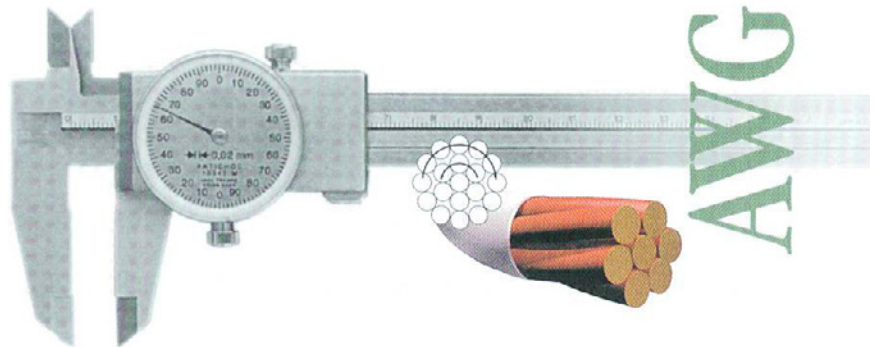

AWG	Draht-Litze Stranding	Durchmesser mm	Diameter inches
	Nominalwerte	Nominals	
14	1/14	1.628	0.0641
	7/22	1.854	0.0730
	19/27	1.803	0.0710
	41/30	1.905	0.0750
12	1/12	2.052	0.0808
	7/20	2.438	0.0960
	19/25	2.286	0.0900
	37/28	2.261	0.0890
10	1/10	2.588	0.1019
	37/26	2.794	0.1100
	105/30	3.226	0.1270
8	1/8	3.264	0.1285
	49/25	3.734	0.1470
	133/29	4.216	0.1660
6	1/6	4.115	0.1620
	133/27	5.334	0.2100
	266/30	5.334	0.2100
4	1/4	5.189	0.2043
	133/25	6.528	0.2570
	420/30	6.528	0.2570
2	1/2	6.586	0.2593
	665/30	8.306	0.3270
1	1/1	7.348	0.2893
	817/30	9.576	0.3770
	2109/34	9.652	0.3800
1/0	259/24	10.770	0.4240
	1045/30	10.643	0.4190
2/0	259/23	11.582	0.4560
	1330/30	11.862	0.4670
3/0	427/24	11.786	0.4640
	1665/30	13.360	0.5260
4/0	427/23	15.189	0.5980
	2107/30	15.113	0.5950

Irrtümer und technische Änderungen
vorbehalten!

No responsibility accepted for errors in contents.
Subject to change.